


Dátový list pre produkt: IL198295-A

Metering insert 2-45M compl. 6 cou. pl. front pl. st. STMK

Frontblende Stahlblech

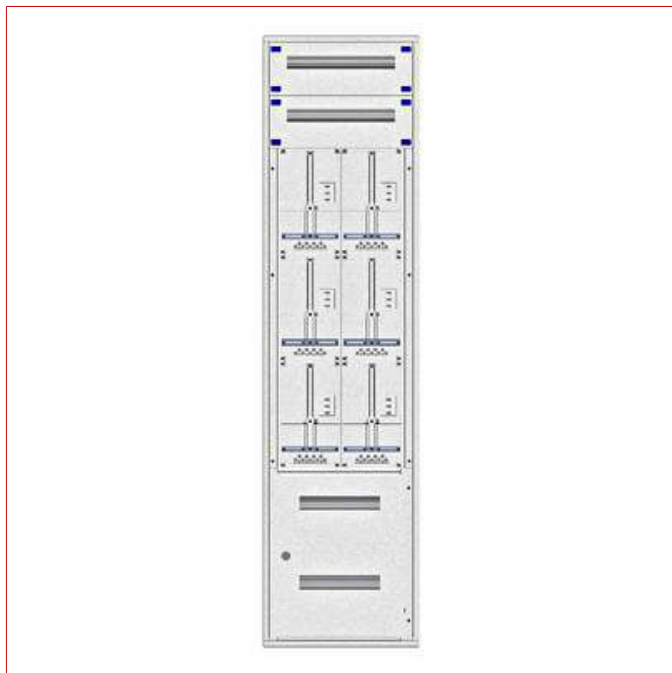

Technické informácie

Šírka (mm)	500,00
Výška (mm)	2.070,00
Hĺbka (mm)	102,00
EAN kód	9004840967371
Typ produktu	elektromerová vložka
Región	Štajersko
Vložky	čelné kryty plastové
Farba	RAL 7035
Šírka (počet elektromerov)	2
Počet výškových jednotiek U	45
Počet elektromerových radov	3
Počet elektromerových miest	6
Elektromerové rady	2
Čelný kryt	oceľový plech
Základný popis	vložka

Tabuľka objednávacích čísel

POPIS	Hmotnosť medi (kg/km)	OBJ. ČÍSLO
Metering insert 2-45M compl. 6 cou. pl. front pl. st. STMK Frontblende Stahlblech		IL198295-A
Voliteľné príslušenstvo		
Zemniaca súprava 300mm/ Yf 6mm ² komplet s upevňov.skrutkami		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824