

Dátový list pre produkt: DSS478010B

# Serv. rozvádzač DSS, Š=800 V=2194 H=1000, 19", 47U, 1800kg

RAL9005 Čierna, predné dvere perforované po celej šírke, zadné dvere perforované dvojkrídlové



## SCHRACK-Info


- Welded powder-coated sheet steel skeleton 2,0 mm
- Height: 47U
- Width: 800mm
- Other dimensions and Datacenter-version with flat roof for cold-aisle are available upon request.
- Depth: 1.000 mm
- Colour: RAL9005 Black
- Maximum static load: 1.800 kg
- Degree of protection: IP20
- IP54 version with Front Glas-door and rearpanel full-metal available upon request.
- Frontdoor full width, Perforated 80% Permeability with handsome swing handle. Prepared for half-cylinder type locks. Halfcylinder lock (Ordernumber: DV900333), Depth= 40mm, Diameter= 17mm, Fixing= M5 Screw, optional available.
- Doors hinged right. Can be changed to hinging on left.
- Frontdoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Removeable and lockable side-panels. Key included.
- Reardoor Double-wing, Perforated 80% Permeability with handsome swing handle. Reardoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Heavy-Duty base optional: Height = 120 mm

- 19" rails (4 pcs.) galvanised, continuously depthadjustable. Numbering in Height-Units (U) by laser for easy readability.
- In 800 mm wide DSS enclosures, you can choose to adjust the 19" rails to a width of 21".
- In 1.000 and 1.200mm deep DS enclosures, there is an additional pair of vertical rails installed in half depth. This makes installation of high depth accessories together with standard accessories possible at the same time.
- Space between front vertical 19"-rail and door glass at max. spacing:
  - W600 – 30 mm
  - W800 – 50 mm
- Space between rear vertical 19"-rail and rear panel at max. spacing:
  - W600 – 30 mm
  - W800 – 55 mm
- Maximum distance between vertical rails (19"-rails) in free-standing cabinets:
  - W600 x D800 – 730 mm
  - W600 x D1000 – 930 mm
  - W800 x D800 – 670 mm
  - W800 x D1000 – 870 mm
  - W800 x D1200 – 1070 mm
- Maximum usable depth in free-standing cabinets when installed e.g. on shelves:
  - D800 – 775 mm
  - D1000 – 975 mm
  - D1200 – 1175 mm
- Spacing between vertical 19"-rails: 451 mm
- Roof construction with opening, 19" punched. Flexible covered by removable plates of different heights to allow installation of fan-units and cable-entry panels. Remaining opening can be closed by use of one of these plates.
  - D800 - Opening: 10 U, Covering: 2 x 4 U and 1 x 2 U
  - D1000 - Opening: 12 U, Covering: 2 x 4 U and 2 x 2 U
  - D1200 - Opening: 12 U, Covering: 2 x 4 U and 2 x 2 U
- Floor construction with opening, 19" punched. Covered by removable plate in full height.
  - D800 - Opening: 10 U, Covering: 1 x 10 U
  - D1000 - Opening: 12 U, Covering: 1 x 12 U
  - D1200 - Opening: 12 U, Covering: 1 x 12 U
- Roof unit assemblies can also be fitted to floor section. Standard base required.
- Cable entry possible via roof, base and rear panel. Delivered with demountable or break-out blanking plates.
- Brush strip panel for roof (DBK24800) optional.
- Air vents for passive ventilation
- Earthing:
  - M8-Earthing point plus 19"-Earthingset in the rear of the cabinet
  - FastOn-Earthing-connections to all dismountable parts pre-installed
- Included assembly materials:
  - 16 x Cage nuts, bolts and washers M6
  - 4 x Levelling feet
  - 1 x Brush
  - 1 x Edge Protection for cable-entry
- Wide range of available accessories (fan-units, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.).
- Enclosure is delivered completely assembled on a disposable pallet.

## Technické informácie

|                          |                   |
|--------------------------|-------------------|
| Šírka (mm)               | 800,00            |
| Výška (mm)               | 2.194,00          |
| Hĺbka (mm)               | 1.000,00          |
| Hmotnosť (kg)            | 159,00            |
| Min. teplota okolia (°C) | 0                 |
| Max. teplota okolia (°C) | 40                |
| Určené pre U             | 47U-2195mm        |
| Farba                    | RAL 9005 (čierna) |

## Rozmerový obrázok: Serv. rozvádzač DSS, Š=800 V=2194 H=1000, 19", 47U, 1800kg

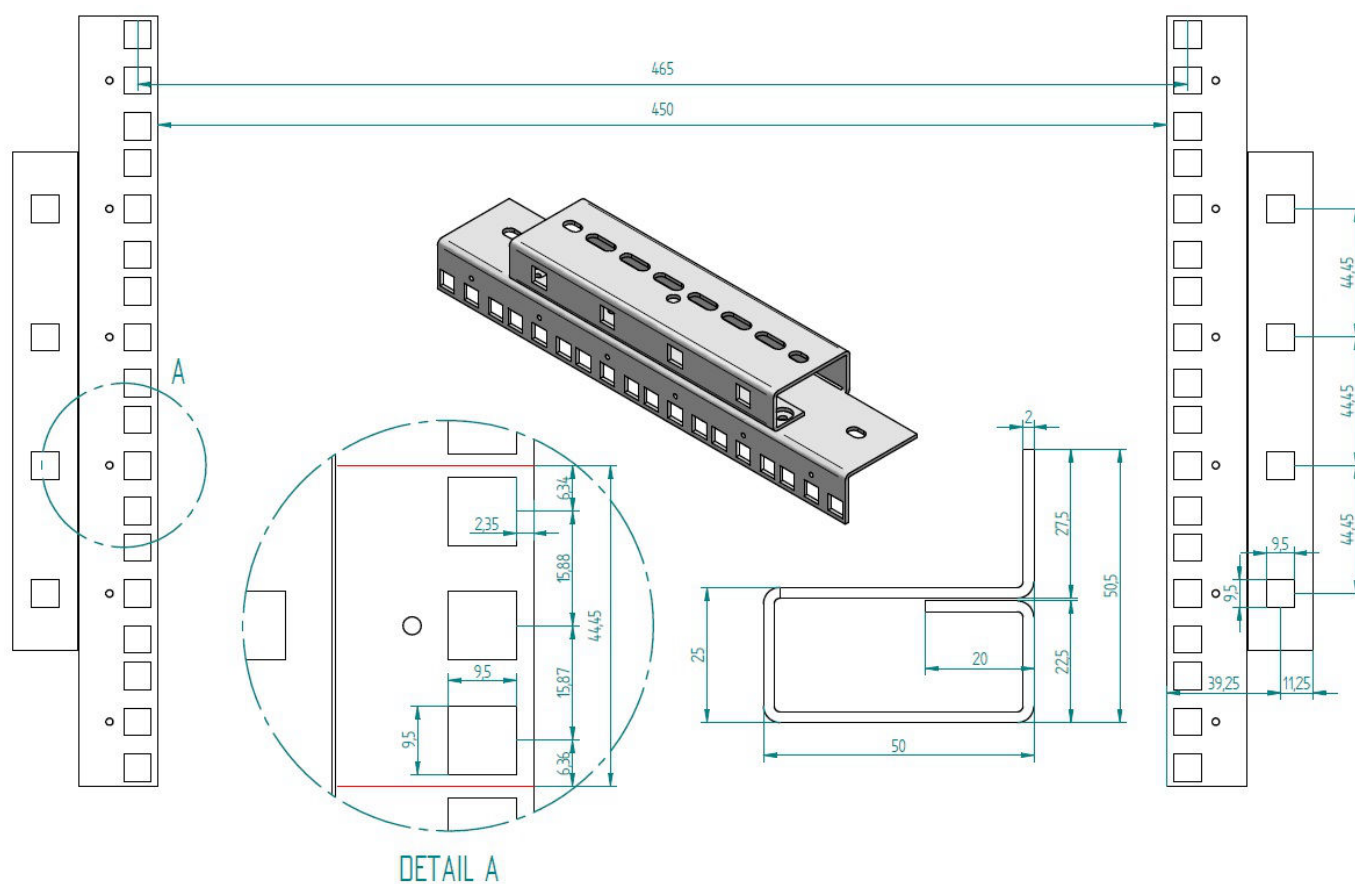

## Tabuľka objednávacích čísel

| POPIS                                                                                                            | OBJ. ČÍSLO |
|------------------------------------------------------------------------------------------------------------------|------------|
| Serv. rozvádzač DSS, Š=800 V=2194 H=1000, 19", 47U, 1800kg                                                       | DSS478010B |
| RAL9005 Čierna, predné dvere perforované po celej šírke, zadné dvere perforované dvojkrídlové                    |            |
| <b>Voliteľné príslušenstvo</b>                                                                                   |            |
| Vložka polcylindrického zámku 333, EMKA s jedným kľúčom<br>vrátane 1x zapustenej skrutky M5x16mm V2A             | DV900333S  |
| Strešný káblový vstup s kefou proti prachu, 2U, RAL9005                                                          | DBK24800-B |
| Horná/spodná ventil.jednotka, 2x ventilátor, termostat, 4U<br>RAL9005, pre voľne stojace rozvádzače DS/DSZ a DSS | DLT44802-B |
| Bočný panel (pár) podstavca pre rozvádzač DSS, hl.1000mm<br>RAL9005 čierna                                       | DSSOT1210B |
| Pred./zad.panel podstavca,perf.+protiprachový filter,š.800mm<br>Stojacia skrinka, čierna RAL9005                 | DSOF1283-B |
| 19" vyvážovací panel, 1U, 5x kovové oko, 63mm, RAL9005                                                           | DTBC105R-B |
| 19" vyvážovací panel,5x veľké kovové oko, 1U, čierny                                                             | DBC14805-B |
| 19" vyvážovací panel, 5x veľké plastové oko, 1U, čierny                                                          | DBK14805-B |
| 19"pevná perforovaná polica, H=450mm, 1U, čierna<br>maximálna nosnosť 80kg                                       | DFS14845-T |
| Napájací panel PDU 19", 9x SCHUKO, 1U, kábel 3 m                                                                 | IU070114-3 |
| 19" napájací panel 7x230V,2m kábel,typ Schuko, SPD,výška 1U<br>2m prírodný kábel, RAL7035                        | IU070113   |
| 19" PDU, 9x Schuko, 1U, 2m-cable, vypínač, čierny. , ALU<br>hliníkový profil                                     | Q7070114-A |
| 19" PDU, 7x Schuko, Switch, Overvoltage protection, 1U<br>2m prírodný kábel                                      | Q7070113-A |
| Zásuv.panel pas. IN: 400V 16A CEE červ. OUT: 12xC13,6xSch                                                        | HSMPP312   |
| PDU IT METER, 3f dial.,mer.,CEE/36xC13+6xC19,RJ45,2s.,Al                                                         | HSMPP336   |
| Držiak vertikál. PDU pre 600 a 800mm DSS rozvádzače, 1U<br>1 pár = 2 ks, vrátane montážneho materiálu            | DSSPDU010  |
| Držiak vertikál. PDU pre 600 a 800mm DSS rozvádzače, 2U<br>1 pár = 2 ks, vrátane montážneho materiálu            | DSSPDU021  |
| PDU-držiak pre 600 and 800mm šírky DSS-Rozvádzače, 2U<br>1 pár = 2 ks, vrátane montážneho materiálu              | DSSPDU022  |
| Montážna sada M6, 50x matica, skrutka, podložka                                                                  | DSSRA050   |
| 19" montážna platňa, 14U, ocelová, perforovaná<br>vrátane skrutiek a klieťkových matíc                           | DMP1914    |
| Osveťl. jednotka LED, magnet, 230V AC, s dverným spínačom<br>zapnutá po otvorení dvier rozvádzača                | DTLIGHT01  |

## Tabuľka objednávacích čísel

| POPIS                                                                                     | OBJ. ČÍSLO |
|-------------------------------------------------------------------------------------------|------------|
| <b>Voliteľné príslušenstvo</b>                                                            |            |
| Switch 24xRJ45 10/100/1000, tichý, interná nap. jed., 19"<br>bez ventilátora, kovové šasi | QLGSW2457  |
| Patchpanel 19", neosad., 24 modul. SFA/SFB, 1U, čierny, ECO<br>čierny, jednodielny        | HSER0240SP |