


Dátový list pre produkt: HLP24CC00F

Opt.prep.kábel duplex SC/UPC - SC/UPC, 50/125µm OM4, LSOH

vresový fialový, 0,5 m

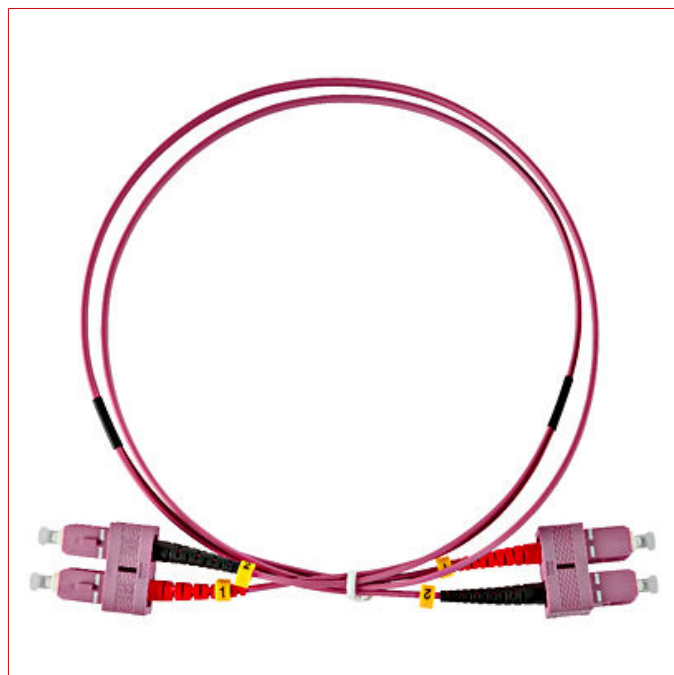

SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- SC/UPC - SC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM

OM4 LS0H

Technické informácie

Normy	IEC 61300-3-4 / IEC 61300-3-6
Norma konektora	IEC 61754
Kombinácia konektorov	SC/SC
Dĺžka patch kábla (m)	0,50
Vlákno	50/125μ OM4 multimód
Plášť kábla	LS0H
Farba	fialová (erika)
Typický útlm (dB)	≤0,25
Typický spätný útlm (dB)	≥30
Min. teplota okolia (°C)	-20
Max. teplota okolia (°C)	60
Šírka (mm)	150,00
Výška (mm)	200,00
Hmotnosť (kg)	0,04

Rozmerový obrázok: Opt.prep.kábel duplex SC/UPC - SC/UPC, 50/125μm OM4, LS0H

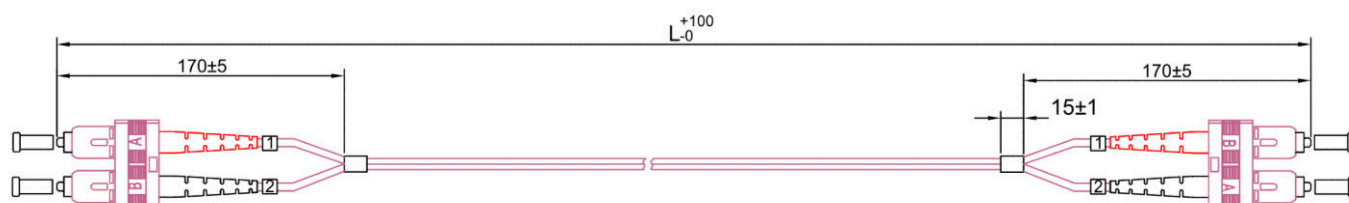

POPIS

OBJ. ČÍSLO

Opt.prep.kábel duplex SC/UPC - SC/UPC, 50/125µm OM4, LS0H
vresový fialový, 0,5 m

HLP24CC00F