

Dátový list pre produkt: HLP29LL03F

Opt.prep.kábel duplex LC/LC, 9/ 125µm OS2, LSOH-3, žltý, 3.0m

LSOH, yellow



SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Technické informácie

Normy	IEC 61300-3-4 / IEC 61300-3-6
Norma konektora	IEC 61754
Kombinácia konektorov	LC/LC
Typ konektora	LC priemer 1,25mm
Dĺžka patch kábla (m)	3,0
Vlákno	9/125 μ OS2 singlemód
Plášť kábla	LS0H
Farba	žltá
Priemer (mm)	2 x 2,2
Typický útlm (dB)	$\leq 0,25$
Typický spätný útlm (dB)	≥ 50
Min. teplota okolia (°C)	-20
Max. teplota okolia (°C)	60
Šírka (mm)	200,00
Výška (mm)	300,00
Hmotnosť (kg)	0,11

Rozmerový obrázok: Opt.prep.kábel duplex LC/LC, 9/125 μ m OS2, LS0H-3, žltý, 3.0m

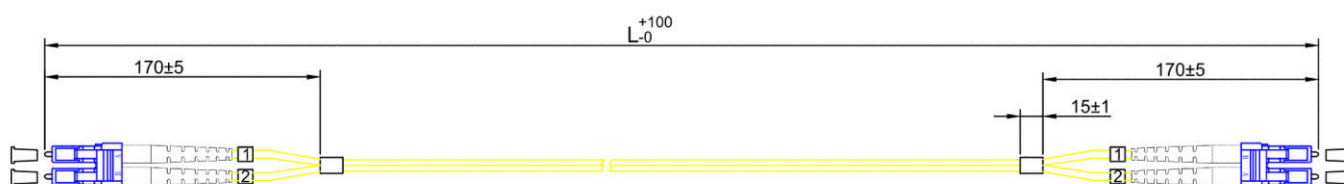

POPIS

OBJ. ČÍSLO

Opt.prep.kábel duplex LC/LC, 9/125µm OS2, LS0H-3, žltý, 3.0m
LS0H, yellow

HLP29LL03F