

Dátový list pre produkt: HSEMRHDMWS

TOOLLESS LINE spojka HDMI biela

HDMI A zdierka - HDMI A zdierka



SCHRACK-Info

ELECTRICAL PROPERTIES

- Resistance of the connector: 30mΩ max.
- Electrical insulation resistance: 100M min.@500VDC
- Rated current and voltage: 0.5A and 40V
- Puncture resistance: 500VAC / 1 minute
- Insulation resistance:
 - Unmated: 100M min. @500VDC
 - Mated: 10MΩ min. @150VDC

MECHANICAL PROPERTIES

- Plug-in cycles: 5000
- Insertion force: 44.1N max.
- Min. Extraction force: 5.9N min. / 39.2N max.
- Contact force: 5,9N / Pin min.
- Color: white

TECHNICAL DATA

- HDMI 19P FEMALE
- Housing: ABS 94V0

- PCB: FR-4 tin plated (lead free)
- Contact carrier: thermoplastic, black
- Pins: copper alloy, nickel and gold plated
- Connector: brass, gold plated
- Operating temperature: -20°C.....+65°C
- HDMI 1.4 (4K / 30fps)

PACKAGING INFORMATION

- Weight: 0,011 kg
- Single piece in Polypack
- 10 pieces in overpack



DIMENSIONS

- 35,0 x 16,2 x 19,3

Technické informácie

Šírka (mm)	17,00
Výška (mm)	19,30
Porty	1
Dĺžka/hĺbka (mm)	35,00
Hmotnosť (kg)	0,01
Min. teplota okolia (°C)	-20
Max. teplota okolia (°C)	65

Rozmerový obrázok: TOOLLESS LINE spojka HDMI biela

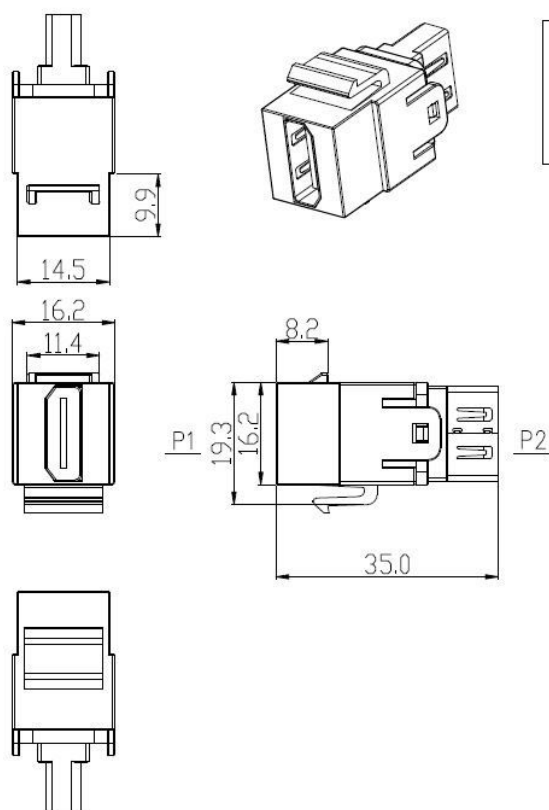

P1		P2
1	—	1
2	—	2
3	—	3
4	—	4
5	—	5
6	—	6
7	—	7
8	—	8
9	—	9
10	—	10
11	—	11
12	—	12
13	—	13
14	—	14
15	—	15
16	—	16
17	—	17
18	—	18
19	—	19
SHELL	—	SHELL

NOTES:

- ELECTRICAL CHARACTERISTICS :
 - RATING CURRENT: 0.5A;
 - RATING VOLTAGE: 40V;
 - CONTACT RESISTANCE: 30m OHMS MAX.
 - INSULATION RESISTANCE:
 - a:UNMATED: 100M OHMS MIN.AT 500 VDC
 - b:MATED: 10M OHMS MIN.AT 150 VDC
 - DIELECTRIC WITHSTANDING VOLTAGE: 500VAC/1MINUTE
 - OPERATING TEMPERATURE: -20°C---+85°C
 - STORAGE TEMPERATURE: -20°C---+65°C
 - OPERATION /STORAGE HUMIDITY:95% OR LESS.
- MECHANICAL CHARACTERISTICS :
 - INSERTION FORCE : 44.1N(MAX)
 - EXTRACTION FORCE: 9.8N(MIN)-39.2N(MAX)
 - MATING CYCLE: 5000 CYCLES:
 - CONTACT PULL OUT FORCE: 5.9N/PIN(MIN)
 - PLASTIC MATERIAL: ABS 94V-0.
- HOUSING: ABS 94V0
- PCB: FR-4 Tin PLATING (LEAD FREE)
- CONN: HDMI 19P FEMALE.
 - INSULATION: ENGINEERING THERMOPLASTIC BLACK;
 - CONTACT: COPPER ALLOY, GOLD OVER NICKEL PLATED;
 - SHELL: BRASS, GOLD FLASH PLATING

Tabuľka objednávacích čísel

POPIS	OBJ. ČÍSLO
TOOLLESS LINE spojka HDMI biela	
HDMI A zdierka - HDMI A zdierka	HSEMRHDMWS
Voliteľné príslušenstvo	
HDMI adaptér 90°, HDMI A samec - HDMI A samica	Q7AH0005-A
19" patchpanel pre 24 modulov (SFA/SFB) neosadený 1U RAL7035	
svetlosivý	HSE0240GS
Dat.zásuvka modul., pre 2 moduly (90st.),neos.,RAL 9010	
biela	HSED02UW1S
Dat.zásuvka 45x45 MOSAIC, OBO žlab neos.,pre 2 moduly	
biely	HSEMD02W2F
Kábel HDMI 1.4, 2x HDMI-19 Typ A male, Ferrit/Gold - 2m	Q7175025
Kábel HDMI 1.4, 2x HDMI-19 Typ A male, Ferrit/Gold - 5m	Q7175027
Kábel HDMI 1.4, 2x HDMI-19 Typ A male, Ferrit/Gold - 10m	Q7175029
Kábel HDMI 1.4, 2x HDMI19 Typ A male,Ferrit/Gold - dĺžka 15m	Q7131912
Kábel HDMI 1.4, 2x HDMI-19 Typ A male, gold, biely - 3m	Q7151834

Tabuľka objednávacích čísel

POPIS	OBJ. ČÍSLO
Voliteľné príslušenstvo	
Kábel HDMI 1.4, 2x HDMI-19 Typ A male, gold, biely - 5m	Q7151835
Kábel HDMI 1.4, 2x HDMI-19 Typ A male, gold, biely - 10m	Q7151837