

Dátový list pre produkt: IUKTS6301A

Chladiaca jednotka DTS 1500W, vonkajšia bočná montáž

400V, IP55, RAL 7035



SCHRACK-Info

General:

- Cooling unit for outer mounting on the door or side (=DTS)
- Compact design for smaller enclosures or to cool hot spots
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

IUKTS6301:

- Cooling performance: 1500W
- Rated voltage: 400V
- Very high energy efficiency ratio (EER)
- Service friendly due to direct access to the PCB and the fans, thus 80 % shorter repair times
- Type of connection: Spring-type terminal included with plug
- Degree of protection IP55: Towards the enclosure
- Degree of protection IP34: Towards the surroundings

Technické informácie


Šírka (mm)

399,00


Technické informácie - Pokračovanie

Výška (mm)	966,00
Hĺbka (mm)	244,00
Hmotnosť (kg)	45,00
Min. teplota okolia (°C)	15
Max. teplota okolia (°C)	55
Krytie	IP55
Trieda ochrany	I
Menovité napätie	400V AC
Typ produktu	chldiace zariadenie
Chladiaci výkon (W)	1500

Kennlinien Kühlleistung

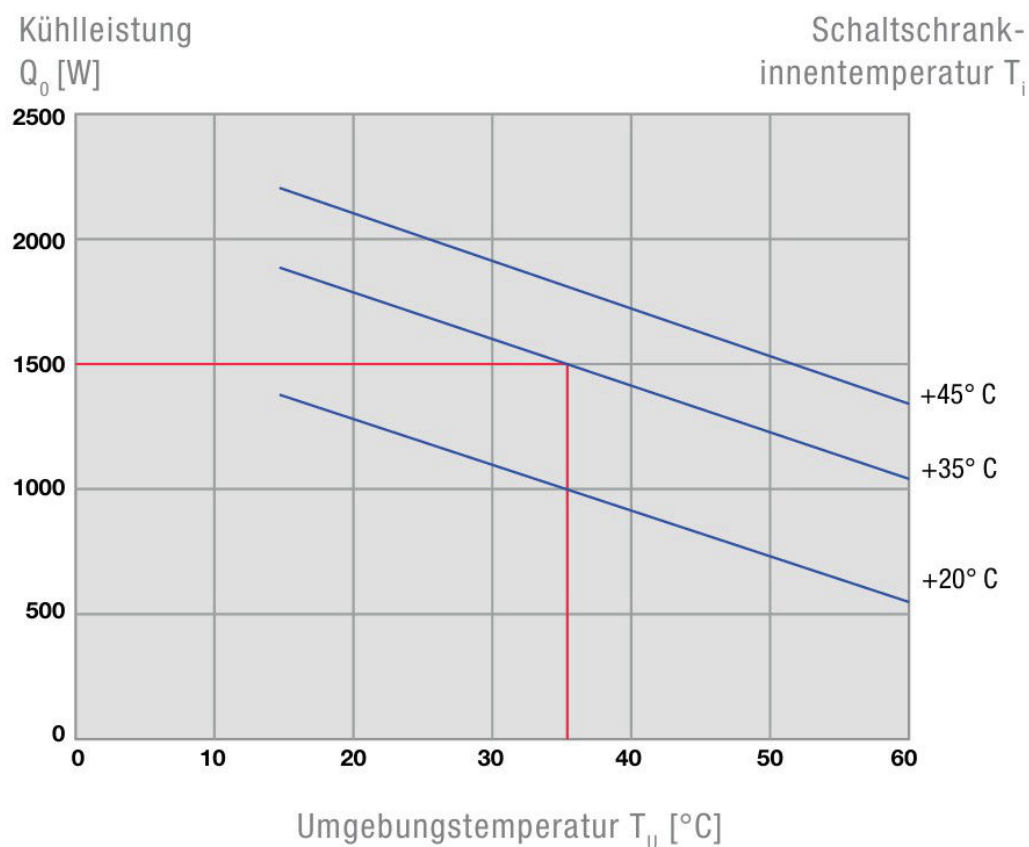

Dimensions and Cutout IUKTI6201A

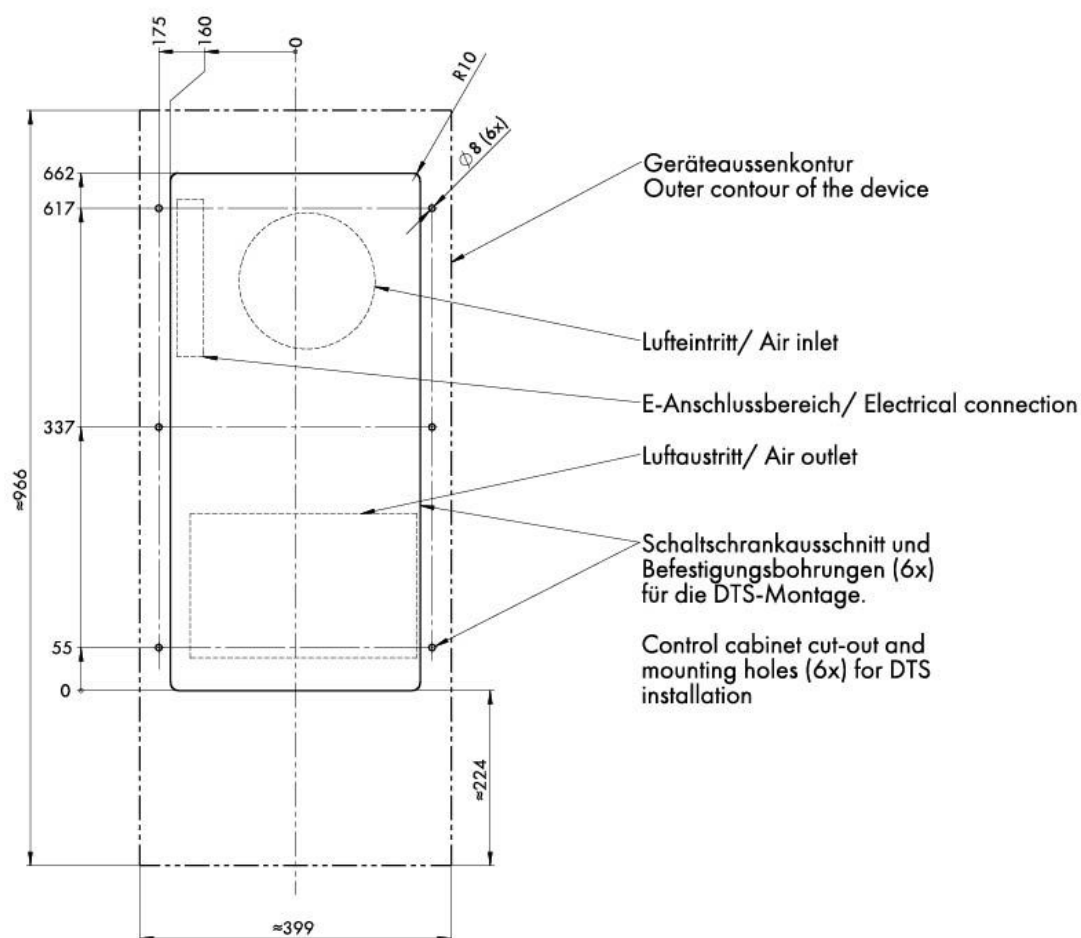

POPIS

OBJ. ČÍSLO

Chladiaca jednotka DTS 1500W, vonkajšia bočná montáž
400V, IP55, RAL 7035

IUKTS6301A