

Dátový list pre produkt: KCIX201262

Nerezová skriňa, 2-krídlová IP55 V=2000 Š=1200 H=600 mm

RAL7035, s montážnym panelom



SCHRACK-Info

- **Material :**
 - Frame: 1,5 mm stainless steel
 - Doors: 2 mm stainless steel
 - Rear panel: 1.5 mm stainless steel
 - Roof panel: 1.5 mm stainless steel
- **Mounting plate :** 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments with depth adjustment brackets ACMPD002. As insertion aid of the mounting plate we recommend the use of slide-in rails ACCLT600 (for depth 600 mm). The slide-in rails are inserted in the floor, after sliding and fixing of the mounting plate they can be removed and reused in the next enclosure
- **Bottom plates :** 1 mm galvanised sheet steel, divided in two parts
- **Frame :** Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including inside circumferential hole pattern
- **Door :** On single door enclosures, the door is mounted on four double-sided hinges allowing left- or right-hand opening. On double door enclosures, hinges are not reversible. Doors for left-hand opening have to be ordered separately. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock :** Four-point rod lock with push-pull handle with spring adjustment and 5 mm DIN double-bit key lock (DDB), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever


- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door and double door IP55
- **Impact resistance** : IK10
- **Finish** : Textured powder coating with UV protection
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Enclosure with door, rear panel, closed roof panel, bottom plates and mounting plate. Delivered on a pallet.



Technické informácie

Šírka (mm)	1.200,00
Výška (mm)	2.000,00
Hĺbka (mm)	600,00
Hmotnosť (kg)	273,00
Min. teplota okolia (°C)	-40
Max. teplota okolia (°C)	80
Krytie	IP55
Trieda ochrany	I
Materiál	nerez 1.4016 (AISI 430)
Farba	RAL 7035 (svetlošedá)
Šírka (mm)	1200
Výška (mm)	2000
Hĺbka (mm)	600
Hrúbka stien korpusu (mm)	1
Montážny panel	galvanizovaná oceľ 3,0 mm
Montážny panel hrúbka (mm)	3
Montážny panel šírka (mm)	1097
Montážny panel výška (mm)	1891
Hrúbka dvier (mm)	2
Počet krytov dna	2
Nosnosť dvier (kg)	100
Počet dvier	2
Šírka podstavy/základne (mm)	2x 518
Hrúbka strešného panelu (mm)	1,50
Hrúbka zadného panelu (mm)	1,50
Trieda korózie	C3-M
Typ produktu	kompaktná skriňa
Nosnosť montážneho panelu (kg)	700
Stratový výkon (W)	-1028,00

Dimensioned Drawing

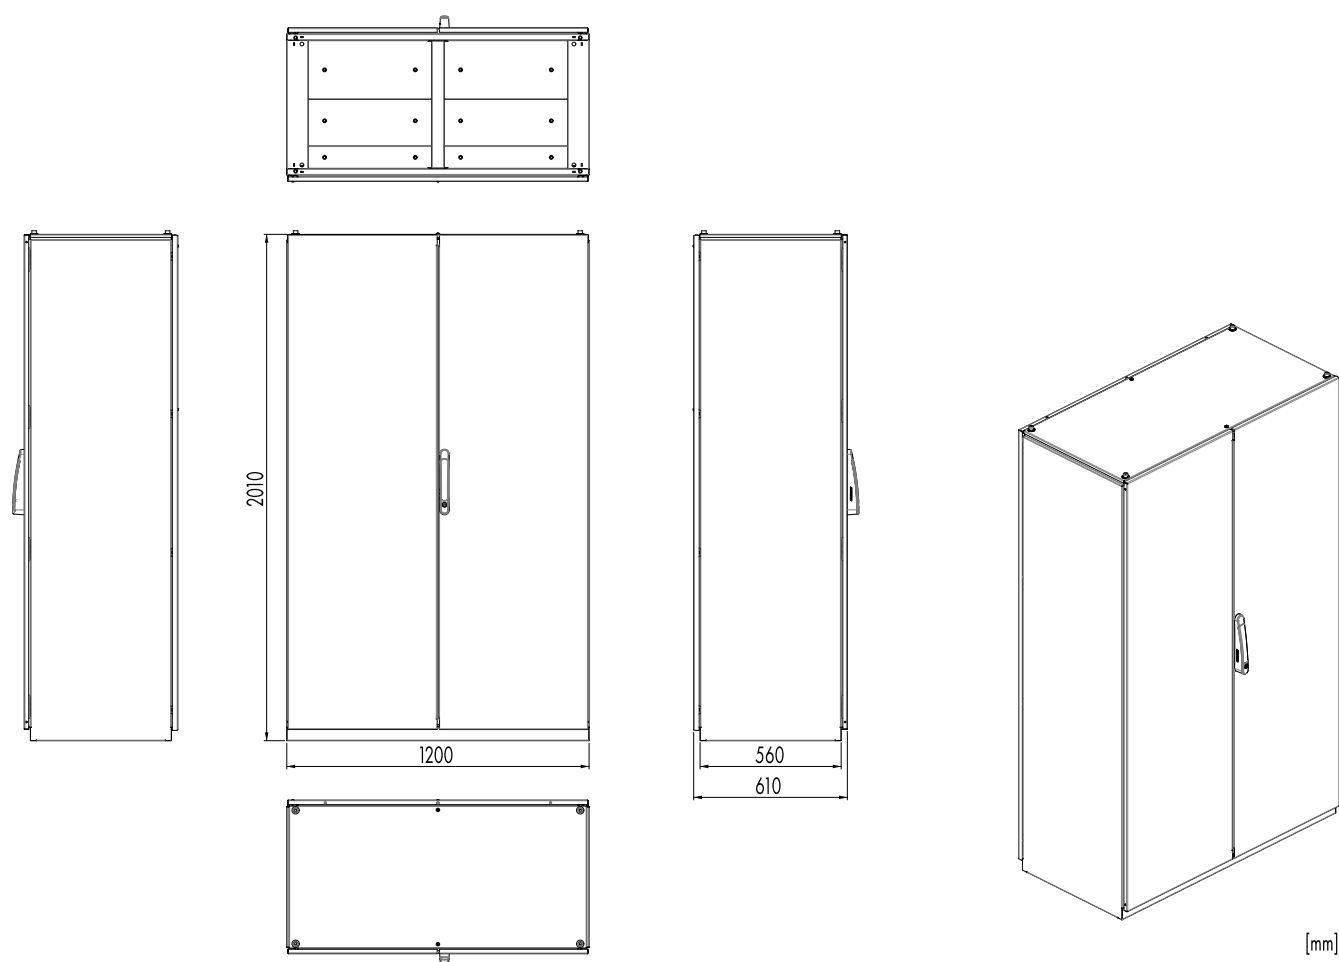

Tabuľka objednávacích čísel

POPIS	OBJ. ČÍSLO
Nerezová skriňa, 2-krídlová IP55 V=2000 Š=1200 H=600 mm RAL7035, s montážnym panelom	KCIX201262
Voliteľné príslušenstvo	
Podstavec predná a zadná časť Š=1200 V=100 mm nerezová oceľ bal=2 kusy, RAL7046 (Telegrey 2)	KCSOBX1201
Podstavec hĺbkový diel (pár) H=600 V=100 mm nerezová oceľ vrátane rohových dielov, predmontované	KCSOTX0601
Strieška proti dažďu s ventilátorom 540 m ³ /h, Š=1200 D=600mm z hliníka, RAL7035, vhodný pre nerezovú skriňu KCIX201262 a vonkajšiu skriňu KCOX201262	KCRC1260F
Strieška proti dažďu s výstupným filtrom, Š=1200 D=600 mm z hliníka, RAL7035, vhodný pre nerezovú skriňu KCIX201262 a vonkajšiu skriňu KCOX201262	KCRC1260E
Zasúvacie koľaje pre montážny panel, do skrine H=600mm pre skrine AC a KC, balenie 1 pár (2ks)	ACCLT600
Závesné oká pozinkované M12 pre skrine AC a KC balenie 4ks	ACLE9301
Výklopná kľuka bez vložky zámku, čierna bez vložky zámku	ACLSC502
Adaptér polcylindrický pre otváraciu kľuku pre skrine AC, KC, AT a KT	ASLS2100
Adaptér pre tlačidlový zámok pre skrine AC a KC	ASLSSI537
Vkladacia matica M6 (balenie 10ks) Vkladacia matica M6 (10x)	ACCNM615
Skrutka so zápusťou hlavou M6x16mm ISO 7380 Skrutka so zápusťou hlavou M6 (10x)	ACCNK006
Vkladacia matica M8 (balenie 10ks) Vkladacia matica M8 (10x)	ACCNM815
Skrutka so zápusťou hlavou M8x16mm ISO 7380 Skrutka so zápusťou hlavou M8 (10x)	ACCNK008
Kľúč 5mm dvojkrídlový balenie 1ks	DV903532