


Dátový list pre produkt: NLKWD001SC

Emergency luminaire KW Autotest LED 3h 230V AC ceiling

1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm

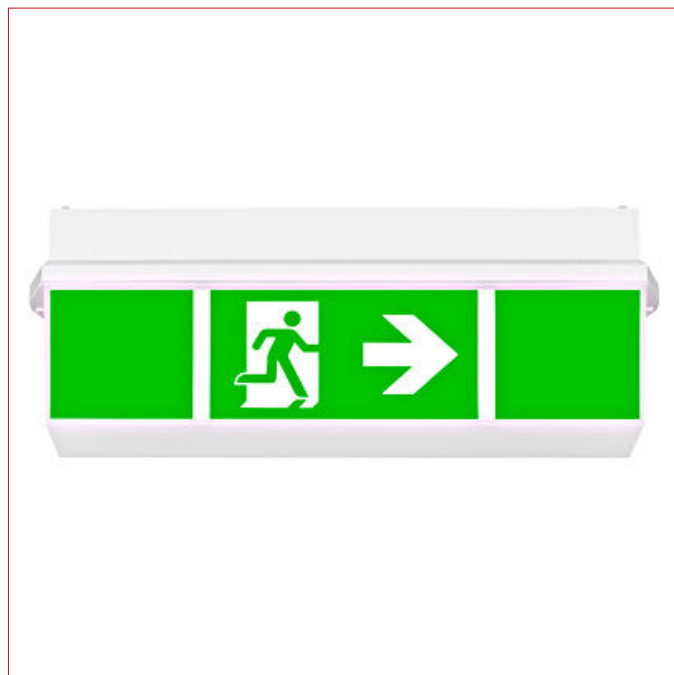


Technické informácie

Dĺžka/hĺbka (mm)	390,00
Šírka (mm)	93,00
Výška (mm)	139,00
Hmotnosť (kg)	1,30
Typ svietidla	núdzové svietidlo
Použitie svietidla	svietidlá s batériou
Funkcia	s batériou a s autotestom
Prevedenie	plastové svietidlo
Dizajn	KW
Bezhalogénový	kryt z bezhalogénového plastu
Farba	biela
Pozorovacia vzdialenosť (m)	16

Technické informácie - Pokračovanie

Čas autonómie (h)	3
Svetelný zdroj	LED (3W)
Svetelný tok (lumen)	1h: 300;3h: 300
Rozsah napätia (V)	230V AC 50Hz $\pm 20\%$
Batéria (V/Ah)	2x 3,2V/3,3Ah LiFePO4
Stupeň ochrany krytom	IP54
Montáž	prisadená na strop
Min. teplota okolia (°C)	-5
Max. teplota okolia (°C)	40
Trieda AA E 8101	AA4
Výrobca	Schrack

Abmessungen (mm)

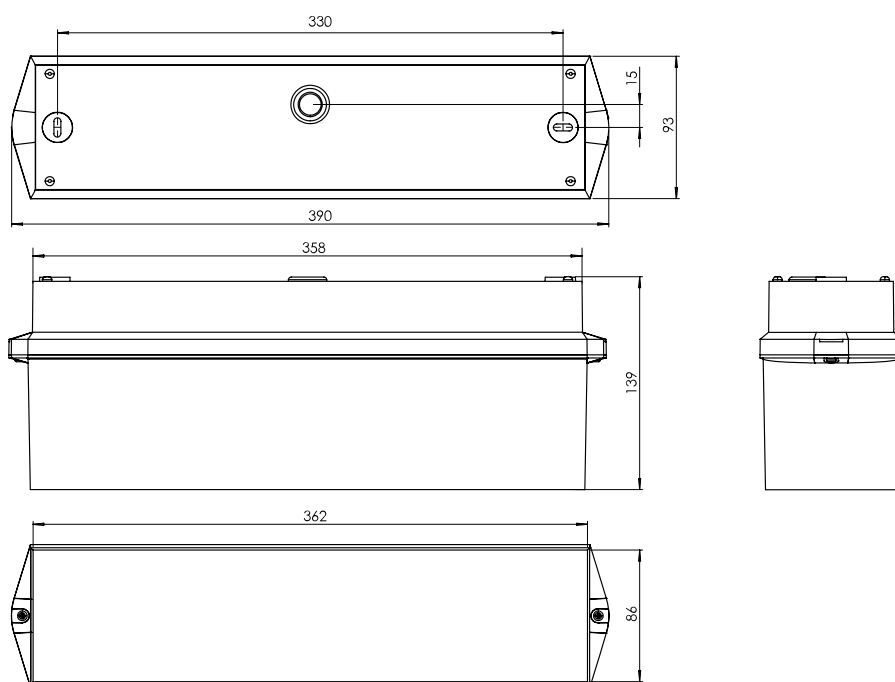

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,55	9,23	8,09	7,02	2,74
2,50	3,68	9,78	8,62	7,52	2,84
3,00	3,72	10,17	8,98	7,85	2,86
3,50	3,66	10,40	9,20	8,05	2,79
4,00	3,51	10,51	9,29	8,11	2,61
5,00	2,80	10,34	9,08	7,86	1,84

Abstandstabelle 8h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	1,95	5,66	5,00	4,37	1,48
2,50	1,70	5,66	4,99	4,34	1,20
3,00	0,99	5,42	4,73	4,06	0,42

Tabuľka objednávacích čísel

POPIS	OBJ. ČÍSLO
Emergency luminaire KW Autotest LED 3h 230V AC ceiling 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one NLKWD001SC side, viewing distance: 16m, IP54, protection class II, 1h: 300lm; 3h: 300lm	
Voliteľné príslušenstvo	
Ochranný kôš pre KW	NLBKW
Závesy dvojité pevné 500mm, biele, zapojené (nie IP65)	NL2PW
Nástenný držiak pre svetidlá KB, KX, KW, KCD	NLAWX001