

Dátový list pre produkt: NLKWD433SC

Emerg.lum. KW Autotest 4x1 W ERT-LED 3h 230V AC ceiling m.

With exchangeable lenses, corridor lenses in scope of delivery included, 1 h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 520lm; 3h: 520lm; 8h: 200lm




Technické informácie

Dĺžka/hĺbka (mm)	390,00
Šírka (mm)	93,00
Výška (mm)	139,00
Hmotnosť (kg)	0,80
Typ svetidla	núdzové svetidlo bezpečnostné svetidlo kombinované bezpečnostné a núdzové
Použitie svetidla	svietidlá s batériou
Funkcia	s batériou a s autotestom
Prevedenie	plastové svetidlo
Dizajn	KW

Technické informácie - Pokračovanie

Bezhalogénový	kryt z bezhalogénového plastu
Farba	biela
Pozorovacia vzdialenosť (m)	16
Čas autonómie (h)	3
Svetelný zdroj	ERT-LED (4W)
Svetelný tok (lumen)	1h: 520;3h: 520;8h: 200
Rozsah napätia (V)	230V AC 50Hz $\pm 20\%$
Batéria (V/Ah)	2x 3,2V/3,3Ah LiFePO4
Stupeň ochrany krytom	IP54
Montáž	prisadená na strop
Min. teplota okolia (°C)	-5
Max. teplota okolia (°C)	40
Trieda AA E 8101	AA4
Výrobca	Schrack

Rozmerový obrázok: Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m.

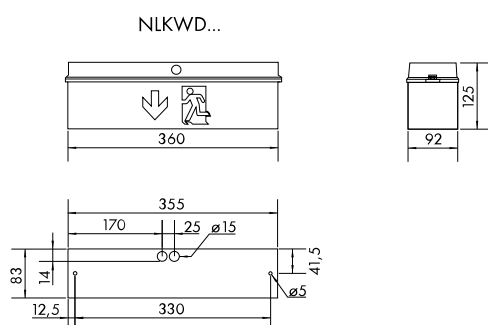

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Tabuľka objednávacích čísel

POPIS	OBJ. ČÍSLO
Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m. With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 520lm; 3h: 520lm; 8h: 200lm	NLKWD433SC
Voliteľné príslušenstvo	
Ochranný kôš pre KW	NLBKW
Závesy dvojité pevné 500mm, biele, zapojené (nie IP65)	NL2PW
Nástenný držiak pre svetidlá KB, KX, KW, KCD	NLAWX001
Set 2 batérii LiFePO4 3,2V 3,3Ah pre WL svetidlá LEO LiFePO4 lítium-železo-fosfátová batéria , UN3480 - lítium iónová	NLAKKU323L