

Dátový list pre produkt: DTWI206067

Nástenný rozvádzač 20U Š600 V1068 H600, exteriérový IP55

rada S-Rack, RAL7035, kovové dvere



SCHRACK-Info

Network wallmount 19" IP55 Outdoor Cabinets are designed for industrial applications.

Based on EN60529 provides IP55 protection class against dust and water ingress.

The enclosure provides IP55 protection against dust and water.

After installation of fans or filters, IP54 is still met.

Application: Outdoor areas under environment influences.

Protection of the installed equipment against ingress of solid foreign objects (falling dirt and windblown dust) and against the ingress of water (rain, sleet, snow, splashing water).

Gasketed doors IP55

3 point locking system with swing handle. Isolated cable entries.

1,5 mm thick material monoblock welded construction, with epoxy polyester type powder coating which is RAL7035 Light Grey color, provides corrosion resistance.

Passive ventilation via filtered inlets.

Option to install fans for active ventilation.

Outdoor cabinets have a fan cover in the top view and side filter cover to comply with protection class IP55.

TECHNICAL DATA

- Colour: RAL7035 Light Grey
- Front door opening angle is up to 140 degrees. Front door has an infused sealing gasket structure which provides excellent IP protection even under cold/hot weather conditions. The front door is grounded to the main body with yellow/green 4,0 mm diameter copper wire.


- Height: 20U
- Width: 600mm
- Depth: 600mm
- Maximum Load: 100kg
- EN/IEC 62262- IK10 mechanische Schlagfestigkeit
- Door: Metal door including keyed swing lock handle with 3point locking system provides security and anti-vandal structure, also maintaining the IP55 protection.
- Included are 4 pcs, 3,0 mm thick wall mounts with matching washer and screws, as well as a cable entry flange with three glands: 2 x PG21, 1 x PG48, 2 x PVC blind caps with 28mm diameter (installed in the floor) and a blind flange (accessory pack).
- Filters are included
- Cabinets are delivered with: 1 set = 2pcs 19" front rails. A second pair of 19" DTWIPROFxx rails for rear mounting is available as an option. This is required for 4-point mounting of heavy equipment.




Technické informácie

Šírka (mm)	600,00
Výška (mm)	1.068,00
Hĺbka (mm)	600,00
Hmotnosť (kg)	58,00
Min. teplota okolia (°C)	-20
Max. teplota okolia (°C)	70
Vhodný pre šírku skrine (mm)	600
Výška (mm)	1068
Farba	RAL 7035 (svetlošedá)
Základný popis	rozvodnica


**Rozmerový obrázok: Nástenný rozvádzač 20U Š600 V1068 H600,
exteriérový IP55**



Top view

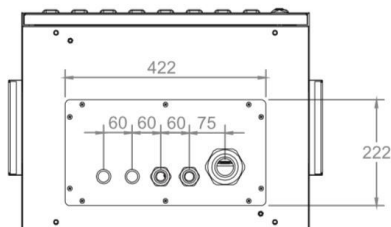


Bottom view

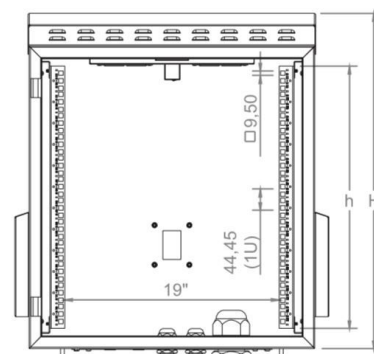


Inside view


**Rozmerový obrázok: Nástenný rozvádzač 20U Š600 V1068 H600,
exteriérový IP55**

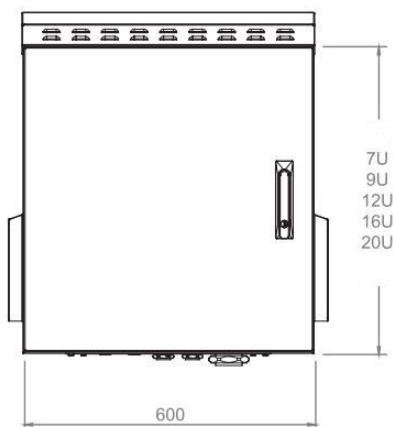

Front view

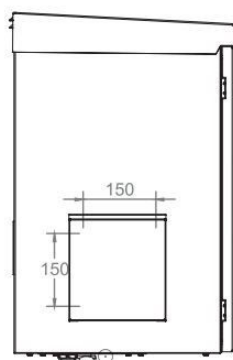


Side view

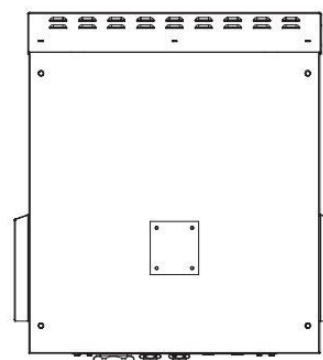


Rear view

Rozmerový obrázok: Nástenný rozvádzač 20U Š600 V1068 H600, exteriérový IP55

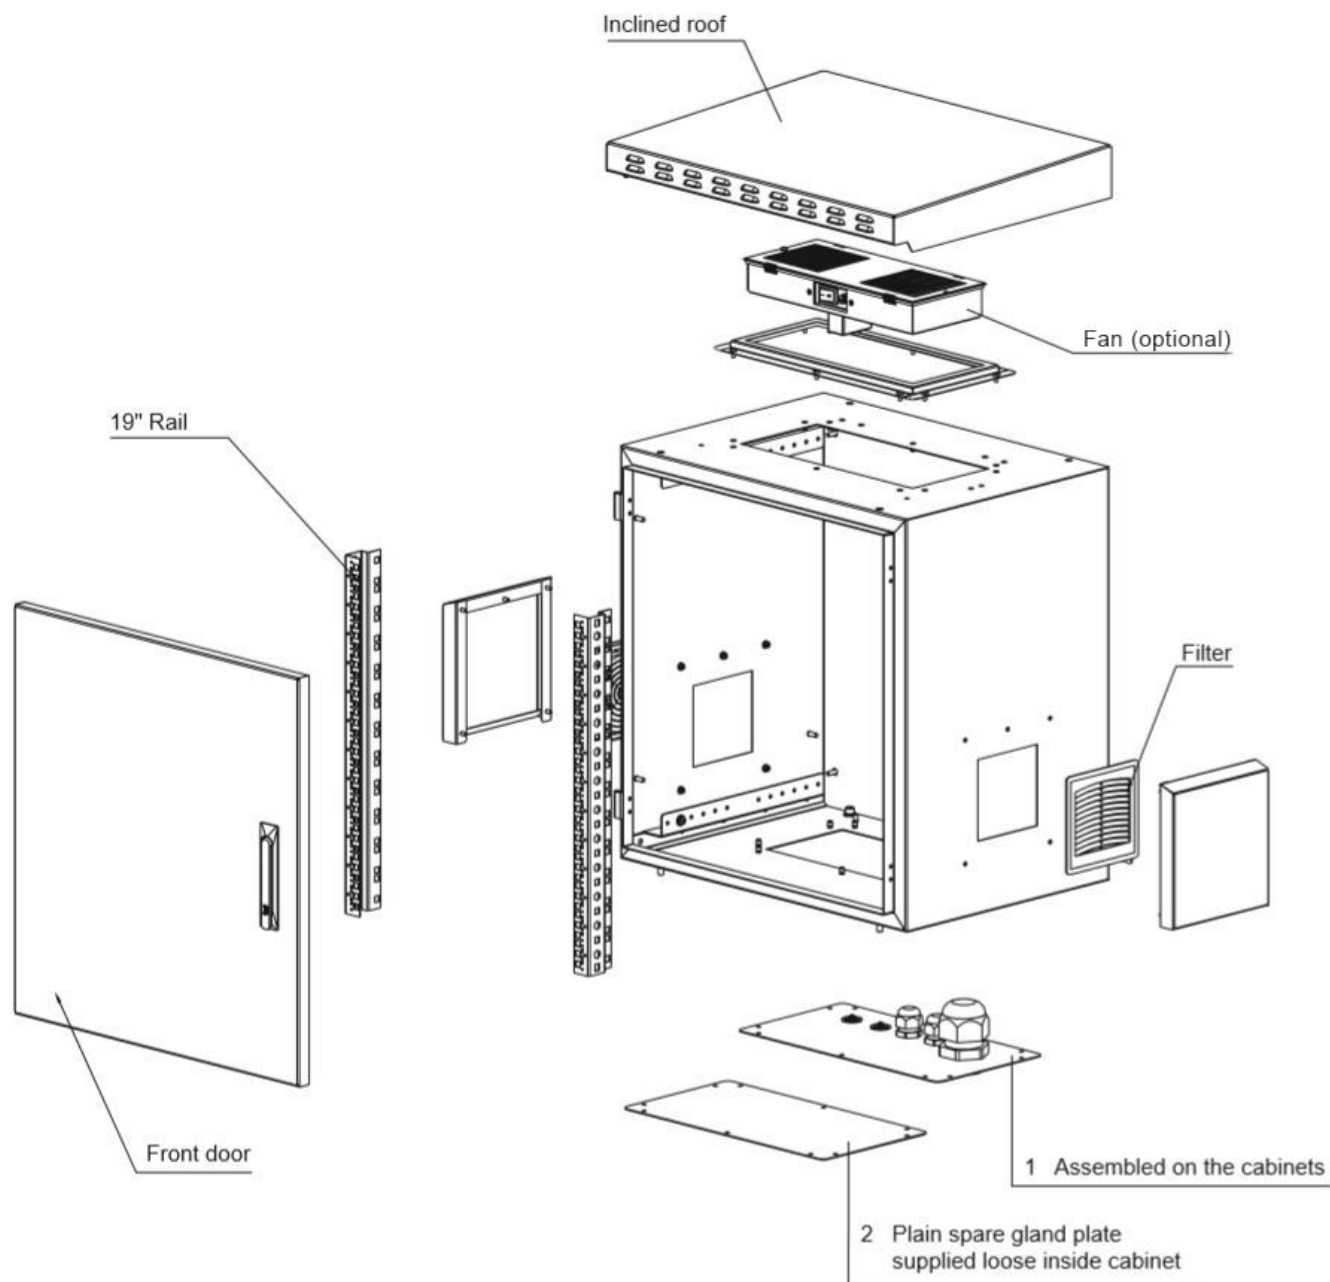

Rozmerový obrázok: Nástenný rozvádzač 20U Š600 V1068 H600, exteriérový IP55

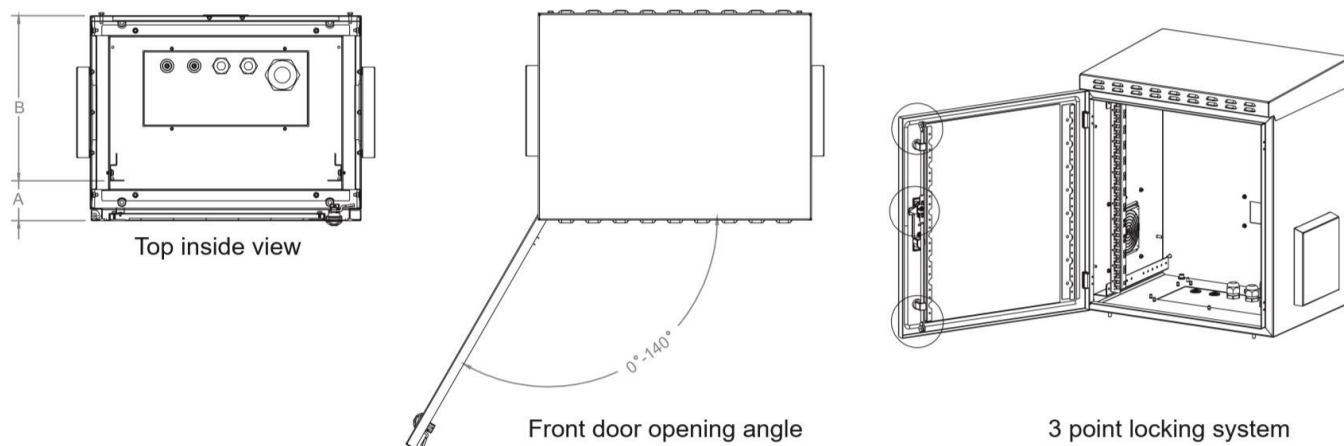

Rozmerový obrázok: Nástenný rozvádzač 20U Š600 V1068 H600, exteriérový IP55

	A		B	
	Min	Max	Min	Max
D=450	60 mm	185 mm	260 mm	385 mm
D=600	60 mm	335 mm	260 mm	535 mm

Tabuľka parametrov: Nástenný rozvádzač 20U Š600 V1068 H600, exteriérový IP55

Typ	v [mm]	V [mm]	Hmotnosť Netto [kg]	Hmotnosť Brutto [kg]
DTWI206067	889	1068	58	59,5

Tabuľka objednávacích čísel

POPIS	OBJ. ČÍSLO
Nástenný rozvádzač 20U Š600 V1068 H600, exteriérový IP55 rada S-Rack, RAL7035, kovové dvere	DTWI206067
Voliteľné príslušenstvo	
Ventilačná jednotka IP54, 1x ventilátor, vypínač, RAL7035 pre nástenné skrine DTWI IP55, svetlo šedá, montáž zvonku	DTLTR5521
Ventilačná jednotka IP54, 2x ventilátor, vypínač, RAL7035 pre dátové rozvádzače DTWI IP55, svetlo sivá, montáž zvonku	DTLTR5522
Súprava 19" profilov, 20U pre nástenné rozvádzače S-RACK 1 bal=2 ks	DTWIPROF20
Podstavec V100mm pre nástennú skriňu, Š600 H600, RAL4035 pre skrine DTWI	DTOTI10606
Súprava pre montáž rozvádzačov DTWI na stĺp, ø11-15cm súprava skrutiek, 2x lišta pre úchyt skrine, 2x držiak na stĺp	DTWIPAK
Výklopná kľuka bez vložky zámku pre S-RACK DT Pre stojanové rozvádzače DT S-Rack	DTZLOCK02
Adaptér pre polvložku pre DTWI Pro outdoor rack DTWI	DTZLOCK05