



Dátový list pre produkt: HLP29DD00F

Opt.prep.kábel duplex SC/APC - SC/APC, 9/125µm OS2, LSOH

žltý, 0.5m

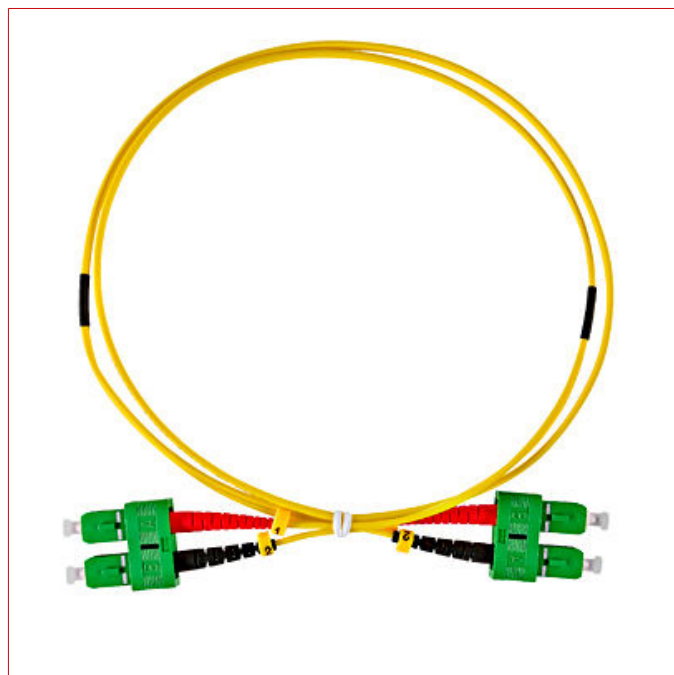

SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- SC/APC - SC/APC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Technické informácie

Šírka (mm)	150,00
Výška (mm)	200,00
Hmotnosť (kg)	0,04
Normy	IEC 61300-3-4 / IEC 61300-3-6
Norma konektora	IEC 61754
Kombinácia konektorov	SC APC/SC APC
Dĺžka patch kábla (m)	0,50
Vlákno	9/125 μ OS2 singlemód
Plášť kábla	LS0H
Farba	žltá
Priemer (mm)	2 x 2,2
Typický útlm (dB)	$\leq 0,25$
Typický spätný útlm (dB)	≥ 60
Min. teplota okolia (°C)	-20
Max. teplota okolia (°C)	60

Rozmerový obrázok: Opt.prep.kábel duplex SC/APC - SC/APC, 9/125 μ m OS2, LS0H

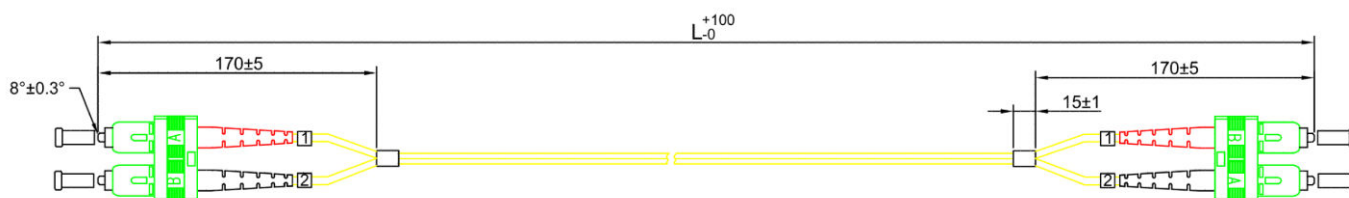

POPIS	OBJ. ČÍSLO
Opt.prep.kábel duplex SC/APC - SC/APC, 9/125 μ m OS2, LS0H žltý, 0.5m	HLP29DD00F